


## TSYSx20R

Red unshielded telephone cable

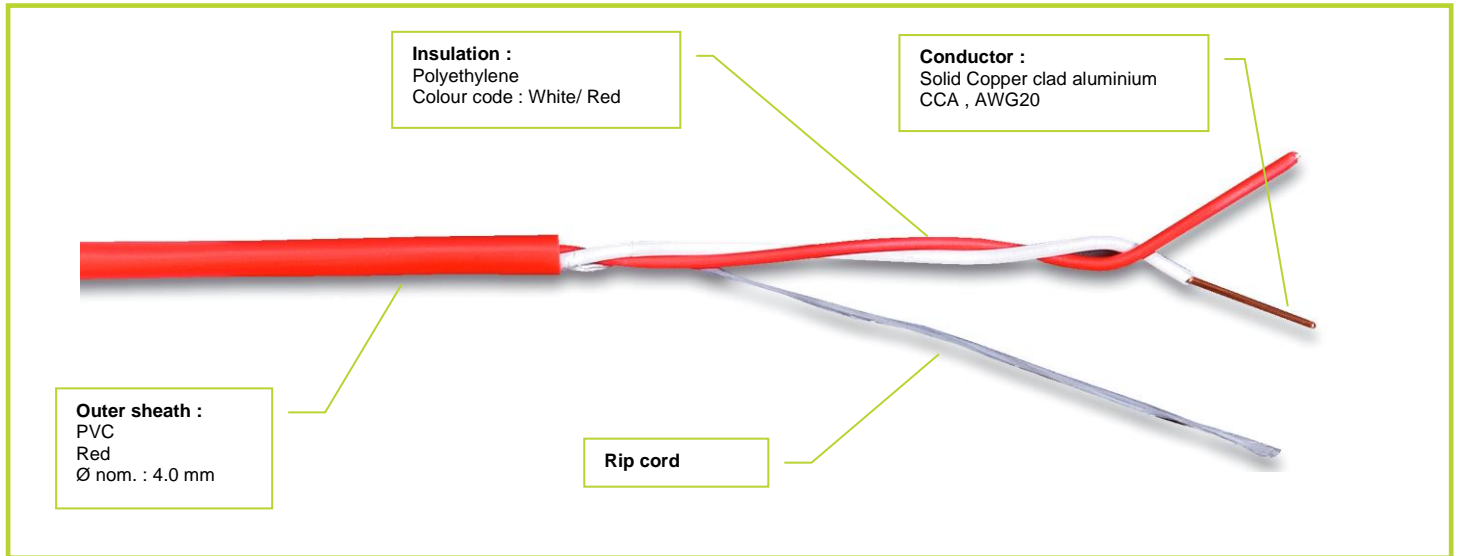

## PRODUCTS INFORMATIONS

### Application

TSYS cables for remote transmission of alarms and for the links between the smoke detectors and the station.

### Description

**Assembly :** in pair

**Marking :**  
TSYS 1x2xAWG20 + batch number + metric marking

### Electrical properties

Maximum operating voltage :	<b>200 V</b>
Test voltage :	<b>1500 V</b>
Impedance (1 MHz) :	<b>100 ±20Ω</b>
Capacity cond/cond :	<b>&lt; 70 nF/km</b>
Linear electrical resistance at 20°C :	<b>&lt; 69.4 Ω/km</b>

### Characteristics



Flame behaviour :  
**IEC 60332-1**  
**EN50575 :2014+A1 :2016 Classe Eca**

Working temperature:  
**- 10°C → + 70°C**

**According to RoHS standard**